The cleanliness Technology

Tunnel





APPLICATIONS

- Continuous cleaning of mechanical parts
- Parts cleaning before assembly
- Parts degreasing in production cell
- Washing following cleaning standards

SPECIFICITIES

- Adjustable design (Width, Lenght, Height...etc)
- Robust construction in stainless steel
- Easy maintenance access
- 3 conveying modes

For more information Contact :




38 Rue de Flandre ZAC du Pays de Bray FR-76270 NEUFCHATEL EN BRAY Ph (33) 02 35 93 00 78 Fax (33) 02 35 94 14 20 contact@mecanolav.com

Operation

- 3 conveying modes :
 - Stainless steel wire belt
 - Two carrying chains
 - Two chains with parts holder
- Capacity:
 - Effective width: 100 mm to 9 m
 - Effective height: 7mm to 1200 mm
 - Flow rate: 0,5 to 2m / min

Application examples



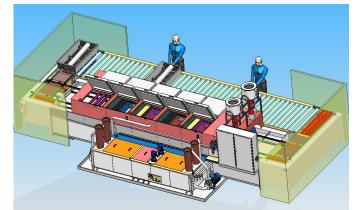







- Tunnel 8 modules Degreasing 1-2 Phosphate coating Drying 1-2 Passivation
- 3 conveying way
 1 part cleaned every 25 seconds

- Loop conveyor
- Tunnel 5 modules
- Hinge cleaning (Wide : 2,5 m)
- LARGE WIDTH tunnel



Access to product page